

Spec Sheet

Genuine Comfort 26" Thru-The-Wall PTAC/PTHP

Unit Size: 26"W x 15-3/4"H Wall Sleeve


FEATURES

- Digital controls
- Slide-Out Washable & Easy-Clean Filter
- Adjustable Air Louvres
- 2 Indoor Fan Speeds
- Hand Held Remote Control (Not Included)
- Error Code Display for easy Diagnostic
- Dual Motors for Quiet & Efficient Operation
- 24 Volt Wall Thermostat Control Option
- Compressor Time Delay Protection and Efficiency
- R410a Refrigerant
- Genuine Care Warranty: 1 Year Unit Replacement (if parts and labour is not available), 6 Year Parts Replacement



MODEL IDENTIFICATION


Example: **GCTWHP-09ANR1-A**

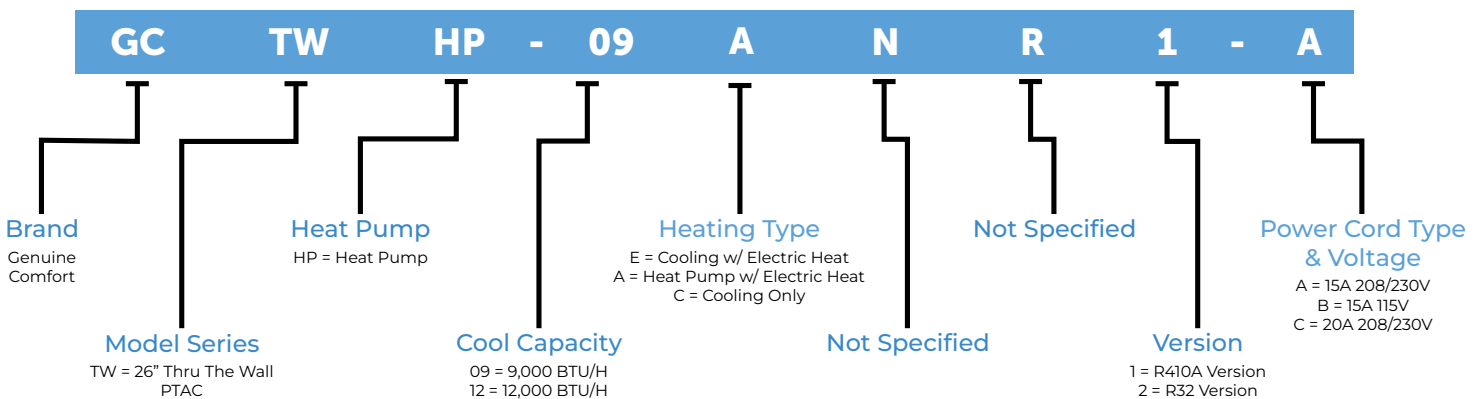


ACCESSORIES *SOLD SEPARATELY



HAND HELD
REMOTE CONTROLLER



WALL SLEEVE



STAMPED GRILLE



ARCHITECTURAL
GRILLE



WIRELESS + WIRED
THERMOSTAT




OCCUPANCY SENSOR
THERMOSTAT



EMS THERMOSTAT


PLUG TYPE

TANDEM




208V/230V 15A

PERPENDICULAR



208V/230V 20A

HORIZONTAL



15A/115V

SPECIFICATIONS (COOLING WITH ELECTRIC HEAT)

Model ID			GCTW-09ENR1-A	GCTW-09ENR1-C	GCTW-12ENR1-A	GCTW-12ENR1-A
Power Supply	Voltage (1 Ph., 60Hz)	V	230/208V	230/208V	230/208V	230/208V
	Capacity	Btu/h	9400/9300	9400/9300	11800/11600	11800/11600
Cooling	Input	A	940/910	940/910	1185/1145	1185/1145
		EER	10.0/10.2	10.0/10.2	10.0/10.1	10.0/10.1
	Capacity	Btu/h	8500/6900	11772/9656	8500/6900	11772/9656
Electric Heater	Input	A	2550/2090	3450/2830	2550/2090	3450/2830
		AMPS	11.1/10	15/13.6	11.1/10	15/13.6
Max Input Consumption		A	2565	3465	2565	3465
Max Current		A	11.30	15.2	11.30	15.2
Indoor Air Flow (L/M/H)		CFM	182 / 235 / 270	182 / 235 / 270	182 / 235 / 270	182 / 235 / 270
Outdoor Fresh Air		CFM	24	24	24	24
Indoor Sound Level (L/M/H)		dB(a)	55 / 58 / 60	55 / 58 / 60	55 / 58 / 60	55 / 58 / 60
Outdoor Sound Level (L/M/H)		dB(a)	67	67	67	67
Unit Dimensions (W x H x D)		inch	26 x 15.6 x 21.57	26 x 15.6 x 21.57	26 x 15.6 x 21.57	26 x 15.6 x 21.57
Package Dimension (W x D x H)		inch	30.12 x 18.9 x 24.8	30.12 x 18.9 x 24.8	30.12 x 18.9 x 24.8	30.12 x 18.9 x 24.8
Net/Gross Weight		lbs.	83/93	83/93	84 / 94	84 / 94
Refrigerant Type			R410A	R410A	R410A	R410A
Operation Temperature (Indoor)		C	16 - 32	16 - 32	16 - 32	16 - 32
		F	60 - 90	60 - 90	60 - 90	60 - 90
Ambient Temperature (Outdoor)		C	16-46	16-46	16-46	16-46
		F	60.8-114.8	60.8-114.8	60.8-114.8	60.8-114.8
Cord Type			LCDI-15A	LCDI-20A	LCDI-15A	LCDI-20A
Cord Length		Ft.	6.5	6.5	6.5	6.5

SPECIFICATIONS (HEAT PUMP WITH ELECTRIC HEAT)

Model ID			GCTWHP-09ANR1-B	GCTWHP-09ANR1-A	GCTWHP-09ANR1-C
Power Supply	Voltage (1 Ph., 60Hz)	V	115V	230/208V	230/208V
	Capacity	Btu/h	9000	9300/9100	9300/9100
Cooling	Input	A	920	940/910	940/910
		EER	9.8	9.9/10.0	9.9/10.0
	Capacity	Btu/h	8500	8800/8600	8800/8600
Heating	Input	WA	805	830/810	830/810
		COP	3.1	3.1/ 3.1	3.1/ 3.1
	Capacity	Btu/h	4265/3517	8500/6900	11772/9656
Electric Heater	Input	WA	1250/1031	2550/2090	3450/2830
		AMPS	5.3/5	11.1/10	15/13.6
Max Input Consumption		WA	1270	2565	3465
Max Current		A	11.45	11.30	15.2
Indoor Air Flow (L/M/H)		CFM	182 / 235 / 270	182 / 235 / 270	182 / 235 / 270
Outdoor Fresh Air		CFM	24	24	24
Indoor Sound Level (L/M/H)		dB(a)	55 / 57 / 59	55 / 58 / 60	55 / 58 / 60
Outdoor Sound Level (L/M/H)		dB(a)	67	67	67
Unit Dimensions (W x H x D)		inch	26 x 15.6 x 21.57	26 x 15.6 x 21.57	26 x 15.6 x 21.57
Package Dimension (W x D x H)		inch	30.12 x 18.9 x 24.8	30.12 x 18.9 x 24.8	30.12 x 18.9 x 24.8
Net/Gross Weight		lbs.	84/94	84/94	84/94
Refrigerant Type			R410A	R410A	R410A
Operation Temperature (Indoor)		C	16 - 32	16 - 32	16 - 32
		F	60 - 90	60 - 90	60 - 90
Ambient Temperature (Outdoor)		C (Cooling)	16-46	16-46	16-46
		F (Cooling)	60.8-114.8	60.8-114.8	60.8-114.8
		C (Heating)	5-24	5-24	5-24
		F (Heating)	41-75.2	41-75.2	41-75.2
Cord Type			LCDI-15A	LCDI-15A	LCDI-20A
Cord Length		Ft.	6.5	6.5	6.5

SPECIFICATIONS (HEAT PUMP WITH ELECTRIC HEAT) (CONTINUED)

Model ID			GCTWHP-12ANR1-A	GCTWHP-09ANR1-A
Power Supply	Voltage (1 Ph., 60Hz)	V	230/208V	230/208V
	Capacity	Btu/h	11700/11500	11700/11500
Cooling	Input	A	1220/1200	1220/1200
		EER	9.6/9.6	9.6/9.6
	Capacity	Btu/h	11400/11200	11400/11200
Heating	Input	A	1160/1140	1160/1140
		COP	2.9/2.9	2.9/2.9
	Capacity	Btu/h	8500/6900	11772/9656
Electric Heater	Input	WA	2550/2090	3450/2830
		AMPS	11.1/10	15/13.6
Max Input Consumption		WA	2565	3465
Max Current		A	11.30	15.2
Indoor Air Flow (L/M/H)		CFM	182 / 235 / 270	182 / 235 / 270
Outdoor Fresh Air		CFM	24	24
Indoor Sound Level (L/M/H)		dB(a)	55 / 57 / 59	55 / 58 / 60
Outdoor Sound Level (L/M/H)		dB(a)	67	67
Unit Dimensions (W x H x D)		inch	26 x 15.6 x 21.57	26 x 15.6 x 21.57
Package Dimension (W x D x H)		inch	30.12 x 18.9 x 24.8	30.12 x 18.9 x 24.8
Net/Gross Weight		lbs.	97/110	97/110
Refrigerant Type			R410A	R410A
Operation Temperature (Indoor)		C	16 - 32	16 - 32
		F	60 - 90	60 - 90
Ambient Temperature (Outdoor)		C (Cooling)	16-46	16-46
		F (Cooling)	60.8-114.8	60.8-114.8
		C (Heating)	5-24	5-24
		F (Heating)	41-75.2	41-75.2
Cord Type			LCDI-15A	LCDI-20A
Cord Length		Ft.	6.5	6.5

SPECIFICATIONS (COOLING ONLY)

Model ID		GCTW-09CBR1-B	GCTW-12CBR1-B	GCTW-12CNR1-B	
Power Supply	Voltage (1 Ph., 60Hz)	V	115V	115V	230/208V
	Capacity	Btu/h	9000	11800	11800/11600
Cooling	Input	A	920	1200	1185/1145
		EER	9.8	9.8	10.0/10.1
Max Input Consumption		A	1178	1423	1465
Max Current		A	11.5	15.63	8.1
Indoor Air Flow (L/M/H)		CFM	194 / 253 / 288	194 / 253 / 288	194 / 253 / 288
Outdoor Fresh Air		CFM	24	24	24
Indoor Sound Level (L/M/H)		dB(a)	55 / 57 / 59	55 / 57 / 59	55 / 58 / 60
Outdoor Sound Level (L/M/H)		dB(a)	67	67	67
Unit Dimensions (W x H x D)		inch	26 x 15.6 x 21.57	26 x 15.6 x 21.57	26 x 15.6 x 21.57
Package Dimension (W x D x H)		inch	30.12 x 18.9 x 24.8	30.12 x 18.9 x 24.8	30.12 x 18.9 x 24.8
Net/Gross Weight		lbs.	80/90	84/94	82/92
Refrigerant Type			R410A	R410A	R410A
Operation Temperature (Indoor)		C	16 - 32	16 - 32	16 - 32
		F	60 - 90	60 - 90	60 - 90
Ambient Temperature (Outdoor)		C	16-46	16-46	16-46
		F	60.8-114.8	60.8-114.8	60.8-114.8
Cord Type			LCDI-15A	LCDI-15A	LCDI-15A
Cord Length		Ft.	6.5	6.5	6.5