

# Spec Sheet

## Genuine Comfort Side-Vent Window Air Conditioner

Cooling Capacity BTU/H Sizes: 8,000, 10,000, 12,000


### FEATURES

- Digital controls
- Hand Held Remote Control (Included)
- Dehumidify Mode
- Slide-Out Washable & Easy-Clean Filter
- Adjustable Air Louvres
- 3 Fan Speeds
- Energy Saver Mode
- Sleep mode
- 24 Hour Programmable Timer
- Error Code Display for easy Diagnostic
- Reduced Height to Fit Side Vented Wall Sleeves
- Filter Replacement Reminder
- R32 Refrigerant
- Genuine Care Warranty: 1-Year Unit Replacement




### MODEL IDENTIFICATION

Example: GCWA-08LA00CDS1

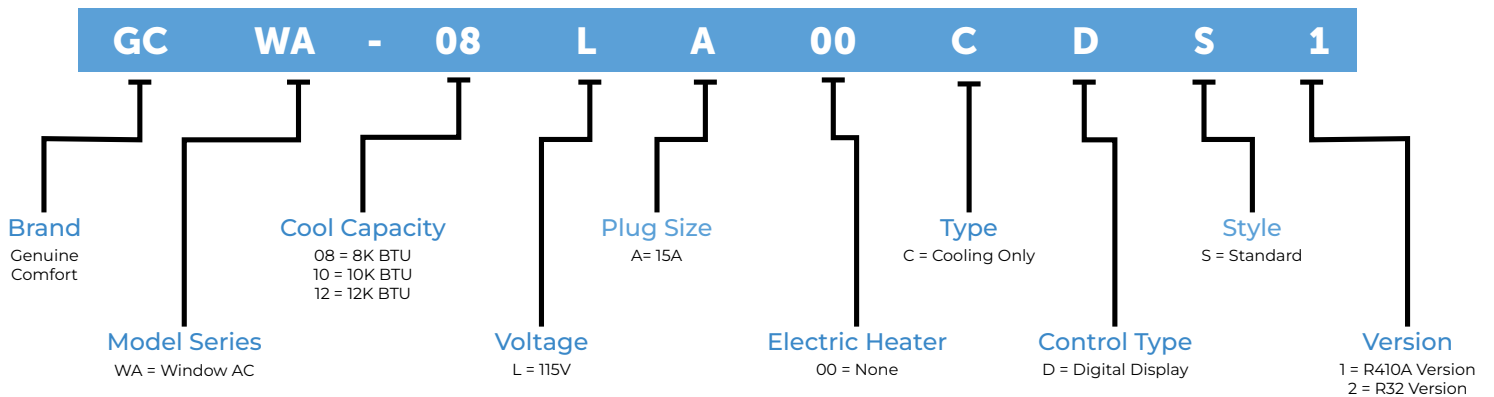

## PLUG TYPE

### HORIZONTAL



115V 15A

## SPECIFICATIONS (COOLING ONLY)

Model ID		GCWA-08LA00CDS2	GCWA-10LA00CDS2	GCWA-12LA00CDS2
Power Supply	Voltage (1 Ph., 60Hz)	V	115	115
	Capacity	Btu/h	8,000	10,100
Cooling	Input	A	660	840
		EER	12.1	12.0
Max Input Consumption		A	850	1100
Max Current		A	11.5	11.5
Indoor Air Flow (L/M/H)	CFM	188 / 200 / 211	229 / 247 / 264	235 / 264 / 294
Indoor Sound Level (L/M/H)	dB(a)	53 / 56 / 62	55 / 57 / 59	55 / 57 / 59
Outdoor Sound Level (L/M/H)	dB(a)	67	67	67
Unit Dimensions (W x H x D)	inch	18.58 x 12.75 x 15.75	19.01 x 14.56 x 21.26	21.34 x 15.75 x 21.45
Package Dimension (W x H x D)	inch	21.97 x 18.03 x 14.37	23.03 x 21.96 x 17	24.64 x 22.91 x 16.97
Net/Gross Weight	lbs.	22 / 25	26.5 / 30	32 / 36
Refrigerant Type		R32	R32	R32
Operation Temperature (Indoor)	C	16 -30	16 -30	16 -30
	F	61 -86	61 -86	61 -86
Ambient Temperature (Outdoor)	C	18 - 40	18 - 40	18 - 40
	F	64 - 104	65 - 104	65 - 104
Cord Type		LCDI(5-15P)	LCDI(5-15P)	LCDI(5-15P)
Cord Length	Ft.	6.4	6.4	6.4