


ARCHITECTS & ENGINEER SUBMITTAL SHEET

GENUINE COMFORT COMPACT FRIDGE 3.2

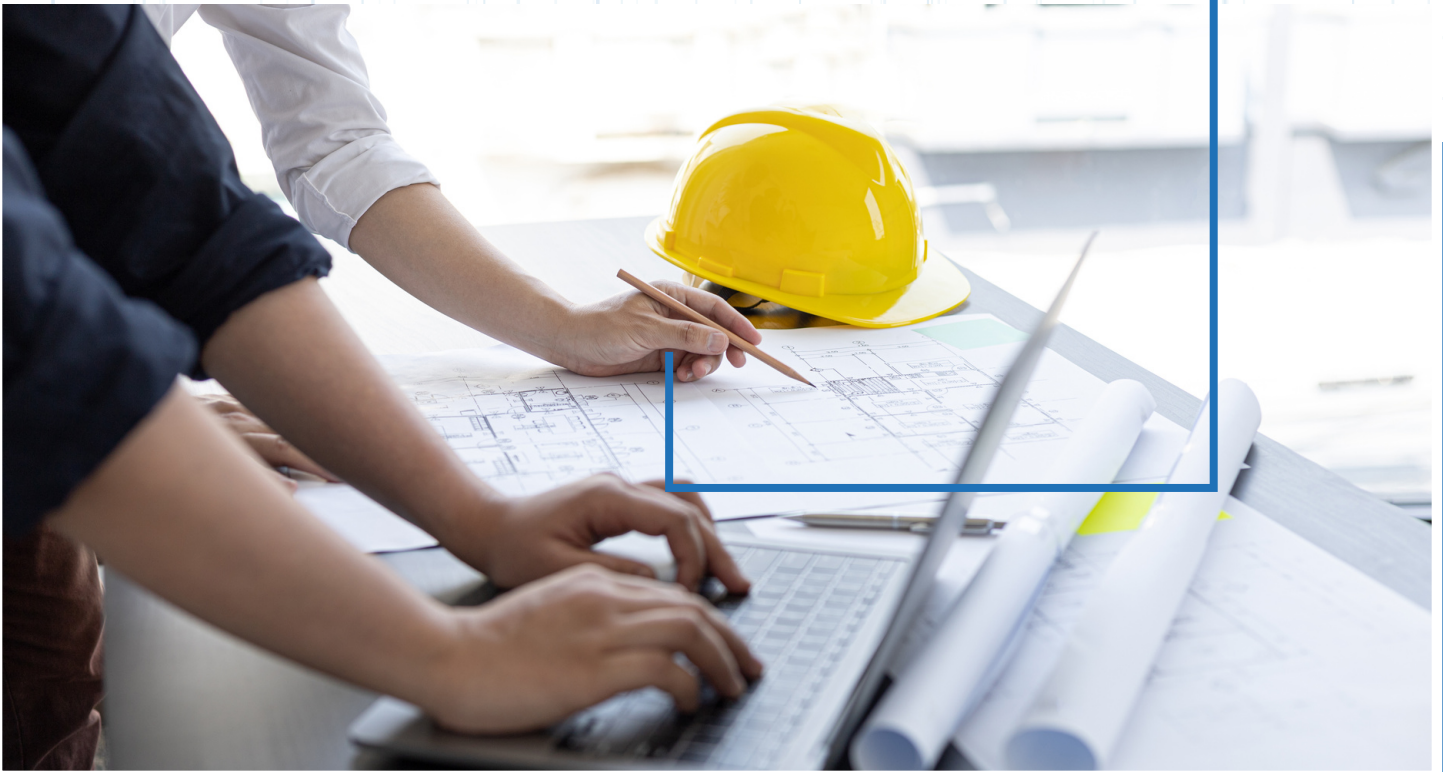

GENUINE COMFORT
DELIVERING COMFORT CONSISTENTLY

Packaged Terminal Air Conditioner

Job Name:		Engineer:	
Pruchaser:		Architect:	
Unit No.:		Contractor:	
Schedule:		Submitted to:	
Location:		Submitted by:	
Comment:		Date Submitted:	

SUBMITTAL SHEET

Genuine Comfort Compact Fridge 3.2

Unit Size: 17.52" W x 19.09" D x 31.18" H

FEATURES


- All-refrigerator Design
- Adjustable thermostat
- Compressor
- Energy Star
- Adjustable feet
- Reversible door
- Door with magnetic seal
- Reversible door
- Handle
- Genuine Care Warranty: 1 Year Unit Replacement



MODEL IDENTIFICATION




Example: GCCF-B32LA0-1

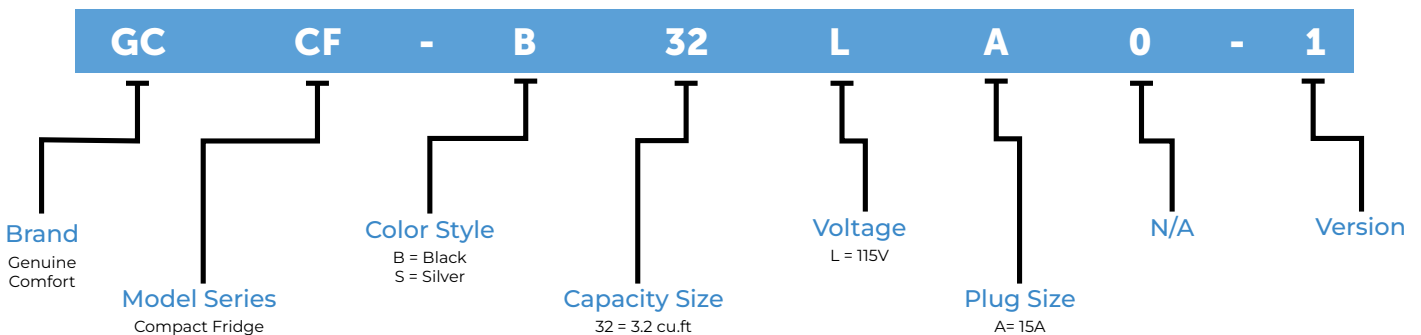


PARTS

1. Removable Food Shelf
2. Drip Tray (at the rear, above the compressor)
3. Temperature Dial
4. Dairy Rack
5. Can Rack
6. Bottle Rack

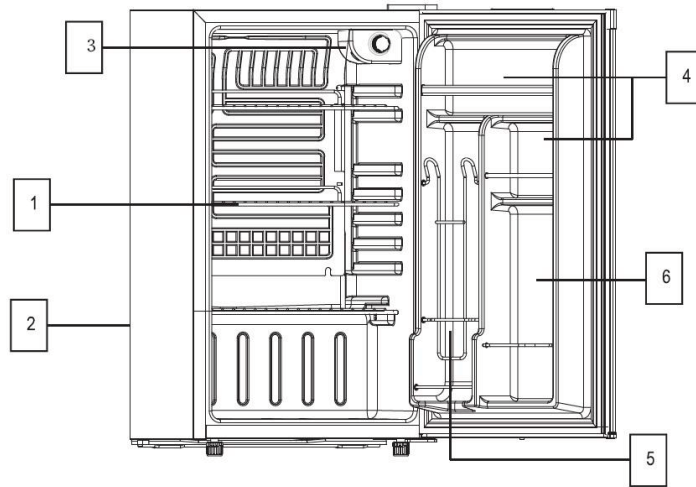


DIMENSION DRAWINGS

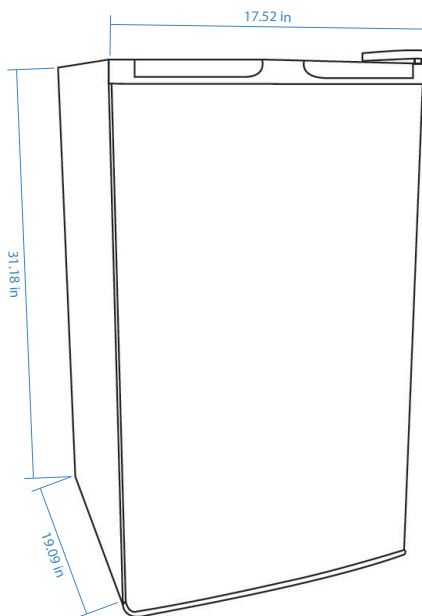

PLUG TYPE

HORIZONTAL



115V 15A

INSTALLATION INSTRUCTIONS

BEFORE USING YOUR UNIT

- Remove the exterior and interior packing.
- Check to be sure you have all of the following parts:
 - 3 Shelves
 - 1 Instruction Manual
- Before connecting the unit to the power source, let it stand upright for approximately 2 hours. This will reduce the possibility of a malfunction in the cooling system from handling during transportation.
- Clean the interior surface with lukewarm water using a soft cloth.

INSTALLING YOUR UNIT

- This appliance is designed to be free standing; there shall be enough venting space if it is recessed or built-in.
- Place your unit on a floor that is strong enough to support the unit when it is fully loaded. To level your unit, adjust the leveling legs at the bottom of the unit.
- Allow space between the back and sides of the unit, which allows the proper air circulation to cool the compressor and condenser.
- Avoid locating the unit in moist areas.
- Plug the unit into an exclusive, properly installed-grounded wall outlet. Do not under any circumstances cut or remove the third (ground) prong from the power cord. Any questions concerning power and/or grounding should be directed toward a certified electrician or an authorized Products service center.
- After plugging the appliance into a wall outlet, allow the unit to cool down for 2-3 hours before placing food in the refrigerator compartment.

ELECTRICAL CONNECTION

- This unit should be properly grounded for your safety. The power cord of this unit is equipped with a three-prong plug which mates with standard three prong wall outlets to minimize the possibility of electrical shock.
- Do not under any circumstances cut or remove the third ground prong from the power cord supplied. For personal safety, this appliance must be properly grounded.
- This unit requires a standard 100~110 Volt AC /60Hz electrical outlet with three-prong ground. Have the wall outlet and circuit checked by a qualified electrician to make sure the outlet is properly grounded. When a standard 2-prong wall outlet is encountered, it is your responsibility and obligation to have it replaced with a properly grounded 3-prong wall outlet.
- The cord should be secured behind the unit and not left exposed or dangling to prevent accidental injury.
- The unit should always be plugged into its own individual electrical outlet which has a voltage rating that matches the rating label on the appliance. This provides the best performance and also prevent overloading house wiring circuits that could cause a fire hazard from overheated. Never unplug the unit by pulling the power cord. Always grip the plug firmly and pull straight out from the receptacle. Repair or replace immediately all power cords that have become frayed or otherwise damaged. Do not use a cord that shows cracks or abrasion damage along its length or at either end. When moving the unit, be careful not to damage the power cord.



WARNING

Improper use of the grounded plug can result in the risk of electrical shock. If the power cord is damaged, have it replaced by an authorized products service center.

EXTENSION CORD

Because of potential safety hazards under certain conditions, it is strongly recommended that you do not use an extension cord with this unit. However, if you must use an extension cord it is absolutely necessary that it be a 3-wire grounding type appliance extension cord having a grounding type plug and outlet and that the electrical rating of the cord be 100~110 volts and at least 15 amperes.

REVERSING THE DOOR SWING OF YOUR APPLIANCE (See Fig. 1-2)

This bar fridge has been with the door hinges on the right. If you wish to change the opening direction, follow the instructions below:

1. Remove the upper hinge cover(6) first
2. Remove the two screws (1) that hold the upper hinge (5) (right side) to the frame. Take away the upper hinge (5).
3. Lift the door and place it on a padded surface to prevent scratching.
4. Remove the two screws (8) that hold the lower hinge (2) remove the lower hinge (2).
5. Remove the left front leg (4) and transfer it to the right side.
6. Remove the hole cover plate (7) to the right side.
7. Install the lower hinge (2) onto the left side of the lower frame with the two screws through the opposite two holes (8).
8. Set the door in its place making sure it sits on the door seat at the lower hinge (2).
9. While holding the door in the closed position secure the upper hinge (5) on the top left hand side with the two screws (1) through the opposite two holes. Do not tighten the two screw (1) until the top of the door is leveled with the counter top.
10. Install the upper hinge cover (6) on the upper hinge.

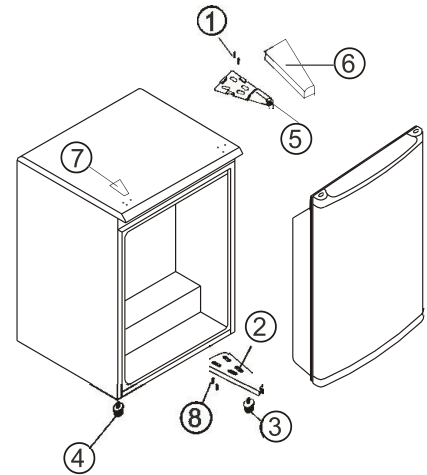


Fig. 1: Door opening from left side

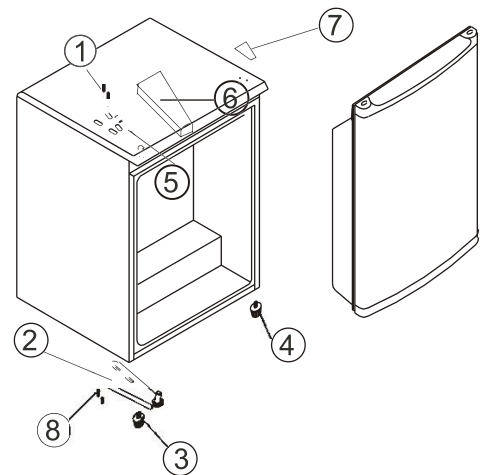


Fig. 2: Door opening from right side

1. Screw
2. Lower hinge
3. Leveling legs
4. Leveling legs
5. Upper hinge
6. Upper hinge cover
7. Hole cover plate
8. opposite two holes

SPECIFICATIONS

Model ID		GCCF-B32LA0-1	GCCF-S32LA0-1
Size Capacity	cu.ft	3.2	3.2
Rated Voltage	Frequency (60Hz)	V	115
Max. Input Consumption	W		
Max Current	A		
Energy consumption	Kwh/24h	219	219
Door Color		Black	Silver
Temperature Range	°C	0-10	0-10
Temperature control		Thermostat	Thermostat
Refrigerant		R600a	R600a
Noise	dB	less or equal to 40	less or equal to 40
Safety Listing Certification		UL	UL
Unit Dimensions W x D x H	in	17.52 x 19.09 x 31.18	17.52 x 19.09 x 31.18
Carton Box Dimensions(in)	in	20.28 x 22.24 x 34.65	20.28 x 22.24 x 34.65
Net Weight	lbs	44.3	44.3
Gross Weight	lbs	57.2	57.2
Cord Type		LCDI(5-15P)	LCDI(5-15P)

Manufacturer reserves the right to change specifications. Our products are subject to continuous improvements. Genuine Comfort reserves the right to modify product design and specifications, discontinue design without notice and without incurring any obligations. Warranty limited to Canada and USA. See warranty documentation for full details.