

Spec Sheet


Genuine Comfort Wireless Wall Thermostat

1 Stage Heat, 1 Stage Cool Conventional | 2 Stage Heat, 1 Stage Cool Heat Pump | Non-Programmable

FEATURES

- Wireless Thermostat
- Easy Read Display
- Blue Back-Light
- Easy Access Battery Compartment
- Electric or Gas Configurable
- Separate B & O Terminals
- Separate Heating and Cooling Swing (Cycle Rate) Adjustments
- Room Temperature Calibration Adjustments
- 3 Minute Compressor Delay Protection (Selectable On or Off)
- Easy Wire Colour Coded Terminal Blocks
- Mounts on Wall or Junction Box
- Battery or 24V Power
- 1 Year Limited Warranty

Model: **GCTH01WS-C**

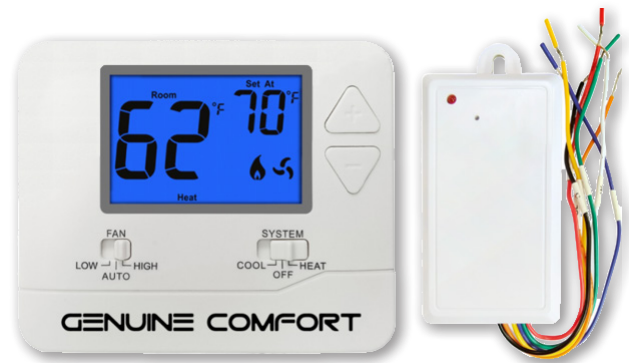

SPECIFICATIONS

Display Range of Temperature	32°F to 99°F (0°C to 40°C)
Control Range of Temperature	44°F to 90°F (7°C to 32°C)
Load Rating	1 amp per terminal, 1.5 amp max all terminals combined
Display Accuracy	+/-1°F
Swing (Cycle Rate or Differential)	Heating and Cooling are adjustable from 0.2°F to 2°F
Power Source	18 to 30 VAC, NEC Class II, 50/60Hz for hardwire (common wire) Battery power from 2 AAA Alkaline batteries
Operating Ambient	32°F to 105°F (0°C to 41°C)
Operating Humidity	90% non-condensing maximum
Dimensions of Thermostat	4.72"W x 3.86"H x 1.1"D
Frequency	433.92MHz

Manufacturer reserves the right to change specifications. Our products are subject to continuous improvements. Genuine Comfort reserves the right to modify product design and specifications, discontinue design without notice and without incurring any obligations.