

# Spec Sheet

## Genuine Comfort Through-The-Wall Air Conditioner

Unit size: 24-7/32" W x 14-1/2" H


### FEATURES

- Digital controls
- Dehumidify Mode
- Energy Saver & Sleep Mode
- 24-Hour Programmable Timer
- Adjustable Air Louvres
- Three Indoor Fan Speeds
- Slide-Out Washable & Easy-Clean Filter
- Hand Held Remote Control (Included)
- Error Code Display For Easy Diagnostic
- Universal Thru-The-Wall Install Kit
- Genuine Care Warranty: 1-Year Unit Replacement



### MODEL IDENTIFICATION

Example: GCTTW-C10KA0-2

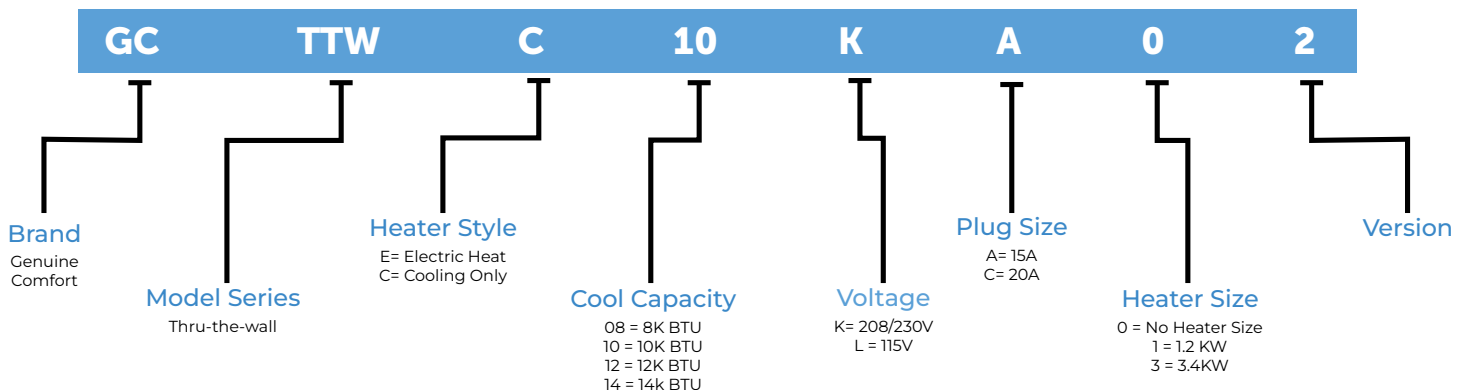


## ACCESSORIES


\*SOLD SEPARATELY



HAND HELD  
REMOTE CONTROLLER



WALL SLEEVE




STAMPED GRILLE



ARCHITECTURAL  
GRILLE


## PLUG TYPE

TANDEM




LCDI (NEMA 6-15P)  
208V/230V 15A

PERPENDICULAR



LCDI (NEMA 6-20P)  
208V/230V 20A

PARALLEL

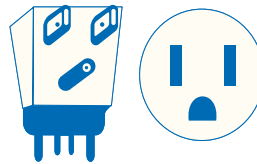

LCDI (NEMA 5-15P)  
115V 15A

## SPECIFICATIONS (COOLING W/ ELECTRIC HEAT)

| Model ID                       |                       | GCTTW-E08LA1-2 |                       | GCTTW-E10KC3-2        |  | GCTTW-E12KC3-2        |  |
|--------------------------------|-----------------------|----------------|-----------------------|-----------------------|--|-----------------------|--|
| Power Supply                   | Voltage (1 Ph., 60Hz) | V              | 115                   | 208/230               |  | 208 / 230             |  |
|                                | Capacity              | Btu/h          | 8,000                 | 9,800/10,000          |  | 11,700/ 12,000        |  |
| Cooling                        | Input                 | W              | 750                   | 980/1000              |  | 1,160 / 1,180         |  |
|                                |                       | EER            | 10.7                  | 10                    |  | 10.5                  |  |
|                                | Capacity              | (BTU/H)        | 4,200                 | 8,600/10,600          |  | 8,600 / 10,600        |  |
| Electric Heater                | Power Input           | W              | 1,220                 | 2,821/3,450           |  | 2,821 / 3,450         |  |
|                                | Amps                  | A              | 11                    | 14/15                 |  | 14 / 15               |  |
| Max Input Consumption          |                       | W              | 1,350                 | 3,450                 |  | 3,450                 |  |
| Max Current                    |                       | A              | 11                    | 15                    |  | 15                    |  |
| Indoor Air Flow (L/M/H)        |                       | CFM            | 192 / 227 / 258       | 241 / 263 / 285       |  | 230 / 251 / 273       |  |
| Indoor Sound Level (L/M/H)     |                       | dB(a)          | 52 / 55.4 / 58.7      | 58 / 60.3 / 62.2      |  | 58 / 60 / 61.8        |  |
| Outdoor Noise Level            |                       | dB (a)         | 63.5                  | 66.3                  |  | 65.4                  |  |
| Ambient Temp (Out-door)        | Cooling               | C°             | 18 - 43               | 18 - 43               |  | 18 - 43               |  |
|                                | Cooling               | F°             | 64 - 109              | 64 - 109              |  | 64 - 109              |  |
| Unit Dimensions (W x D x H)    |                       | inch           | 24.21 * 20.28 * 14.53 | 24.21 * 20.28 * 14.53 |  | 24.21 * 20.28 * 14.53 |  |
| Package Dimensions (W x D x H) |                       | inch           | 27.95 * 26.57 * 16.93 | 27.95 * 26.57 * 16.93 |  | 27.95 * 26.57 * 16.93 |  |
| Net Weight / Gross Weight      |                       | lbs            | 67 / 77               | 68 / 78               |  | 75 / 86               |  |
| Refrigerant Type               |                       |                | R32                   | R32                   |  | R32                   |  |
| Cord Type                      |                       |                | LCDI(5-15P)           | LCDI(6-20P)           |  | LCDI(6-20P)           |  |
| Cord Length                    |                       | Ft             | 5.6                   | 5.6                   |  | 5.6                   |  |

## SPECIFICATIONS (COOLING ONLY)

| Model                          |                       | GCTTW-C10LA0-2 |                       | GCTTW-C12LA0-2        |  |
|--------------------------------|-----------------------|----------------|-----------------------|-----------------------|--|
| Power Supply                   | Voltage (1 Ph., 60Hz) | V              | 115                   | 115                   |  |
|                                | Capacity              | Btu/h          | 10,000                | 12,000                |  |
| Cooling                        | Input                 | W              | 930                   | 1,140                 |  |
|                                |                       | EER            | 10.6                  | 10.5                  |  |
| Max Input Consumption          |                       | W              | 1,290                 | 1,420                 |  |
| Max Current                    |                       | A              | 12.9                  | 14                    |  |
| Indoor Air Flow (L/M/H)        |                       | CFM            | 191 / 220 / 256       | 220 / 250 / 276       |  |
| Indoor Sound Level (L/M/H)     |                       | dB(a)          | 50.2 / 52.8 / 55.8    | 55.3 / 56.8 / 59      |  |
| Outdoor Noise Level            |                       | dB (a)         | 64.3                  | 68.7                  |  |
| Ambient Temp (Outdoor)         | Cooling               | C°             | 18 - 43               | 18 - 43               |  |
|                                | Cooling               | F°             | 64 - 109              | 64 - 109              |  |
| Unit Dimensions (W x D x H)    |                       | inch           | 24.21 * 20.28 * 14.53 | 24.21 * 20.28 * 14.53 |  |
| Package Dimensions (W x D x H) |                       | inch           | 27.95 * 26.57 * 16.93 | 27.95 * 26.57 * 16.93 |  |
| Net Weight / Gross Weight      |                       | lbs            | 67 / 79               | 75 / 88               |  |
| Refrigerant Type               |                       |                | R32                   | R32                   |  |
| Cord Type                      |                       |                | LCDI(5-15P)           | LCDI(5-15P)           |  |
| Cord Length                    |                       | Ft             | 7.02                  | 7.02                  |  |

## SPECIFICATIONS (COOLING ONLY) (CONTINUED)

| Model                          |                       |        | GCTTW-C10KA0-2        | GCTTW-C12KA0-2        | GCTTW-C14KA0-2        |
|--------------------------------|-----------------------|--------|-----------------------|-----------------------|-----------------------|
| Power Supply                   | Voltage (1 Ph., 60Hz) | V      | 208/230               | 208 / 230             | 208 / 230             |
|                                | Capacity              | Btu/h  | 10,200/10,500         | 11,700/ 12,000        | 13,600 / 1,400        |
| Cooling                        | Input                 | W      | 940/970               | 1,110 / 1,140         | 1,360 / 1,400         |
|                                |                       | EER    | 10.6                  | 10.5                  | 9.5                   |
| Max Input Consumption          |                       | W      | 1,235                 | 1,472                 | 1,818                 |
| Max Current                    |                       | A      | 6.7                   | 7.9                   | 9.7                   |
| Indoor Air Flow (L/M/H)        |                       | CFM    | 248 / 272 / 291       | 273 / 259 / 274       | 254 / 264 / 280       |
| Indoor Sound Level (L/M/H)     |                       | dB(a)  | 55.7 / 57.9 / 59.4    | 57.5 / 59 / 60.2      | 58 / 59.5 / 60.5      |
| Outdoor Noise Level            |                       | dB (a) | 68.5                  | 68.3                  | 69.9                  |
| Ambient Temp (Outdoor)         | Cooling               | C°     | 18 - 43               | 18 - 43               | 18 - 43               |
|                                | Cooling               | F°     | 64 - 109              | 64 - 109              | 64 - 109              |
| Unit Dimensions (W x D x H)    |                       | inch   | 24.21 * 20.28 * 14.53 | 24.21 * 20.28 * 14.53 | 24.21 * 20.28 * 14.53 |
| Package Dimensions (W x D x H) |                       | inch   | 27.95 * 26.57 * 16.93 | 27.95 * 26.57 * 16.93 | 27.95 * 26.57 * 16.93 |
| Net Weight / Gross Weight      |                       | lbs    | 68 / 80               | 74 / 87               | 75 / 88               |
| Refrigerant Type               |                       |        | R32                   | R32                   | R32                   |
| Cord Type                      |                       |        | LCDI(6-15P)           | LCDI(6-15P)           | LCDI(6-15P)           |
| Cord Length                    |                       | Ft     | 6.5                   | 6.5                   | 6.5                   |

Manufacturer reserves the right to change specifications. Our products are subject to continuous improvements. Genuine Comfort reserves the right to modify product design and specifications, discontinue design without notice and without incurring any obligations. Warranty limited to Canada and USA. See warranty documentation for full details.