

PCSIDF-KIT-CV (Non-ducted model)



FEATURES

- Ultra Quiet Operation
- Universal Heater
- Three Fan Speed
- R410A Refrigerant
- Attractive Appearance
- Easy to Clean Filter
- Control Options: 24 Volt Wall Thermostat & EMS Connection

ACCESSORIES

- Thermostat
- Architectural Grille
- Easy to clean Filter (filter sold separately)
- PCSIDF Kit

PCSIDF-KIT (Ducted model)



REPLACES

Chromalox Space Command, SI, SI-DF, SHP, SHP-DF, CSDC, CSUC

Select Kit Option

- PCSIDFKIT - Factory Installed
- PCSIDF-KIT-CV - Factory Installed



The Perfect Fit! The Perfect Choice!

For more information

Call 1-866-233-4022

Email info@perfectcomfort.ca

www.perfectcomfort.ca

PCSIDF Specifications

Model PCSIDF w/Kit	Cooling	Sensible Heat Ratio	EER	Electrical Heat			Indoor Air Flow CFM			Shipping Weight	Shipping Box Dimension	Chassis Dimension
	Btu/h (KW)			Btu/h (KW)			Hi	Med	Low	lbs	LxDxH (Inch)	LxDxH (Inch)
PCEA09K00S-T w/kit	9,000(2.6)	0.76	9.5	2, 3, 4			450	380	290	120	45 ¼ x 20 ½ x 17 ⅝	43 ½ x 18 ½ x 15
PCEA12K00S-T w/kit	12,000(3.5)	0.69	9.5	2, 3, 4			450	380	290	128	45 ¼ x 20 ½ x 17 ⅝	43 ½ x 18 ½ x 15
PCEA15K00S-T w/kit	15,000(4.3)	0.69	9.3	2, 3, 4			450	380	290	131	45 ¼ x 20 ½ x 17 ⅝	43 ½ x 18 ½ x 15

PCSIDF - 9,000 BTU Electrical Specifications


Power Supply Volt 1-60		Compressor		Indoor Fan Motor		Outdoor Fan Motor		Electric Heat			Unit Electrical Ratings						
Voltage	Min	RLA	LRA	FLA	Hp	ELA	Hp	HTR#	Volt	W	HA	A / Cooling	A / Heating	Max. AMP	Max. Breaker	Fuse Rating	
208/230V	197	3.9	20	0.55	0.15	0.55	0.15	2 KW	208	1725	8.2	4.5	8.8	9.5	15	6-15P	
									230	2000	8.8						
									3 KW	208	2525	12.1	4.5	13	14	20	6-20P
										230	3000	13					
									4 KW	208	3315	15.9	4.5	17.5	18.5	30	6-30P
										230	4000	17.5					

PCSIDF - 12,000 BTU Electrical Specifications


Power Supply Volt 1-60		Compressor		Indoor Fan Motor		Outdoor Fan Motor		Electric Heat			Unit Electrical Ratings					
Voltage	Min	RLA	LRA	FLA	Hp	ELA	Hp	HTR#	Volt	W	HA	A / Cooling	A / Heating	Max. AMP	Max. Breaker	Fuse Rating
208/230V	197	5.25	28	0.55	0.15	0.55	0.15	2 KW	208	1725	8.2	5.5	8.8	9.5	15	6-15P
									230	2000	8.8					
		3 KW	208						2525	12.1	5.5	13	14	20	6-20P	
			230						3000	13						
		4 KW	208						3315	15.9	5.5	17.5	18.5	30	6-30P	
			230						4000	17.5						

PCSIDF - 15,000 BTU Electrical Specifications

Power Supply Volt 1-60		Compressor		Indoor Fan Motor		Outdoor Fan Motor		Electric Heat			Unit Electrical Ratings						
Voltage	Min	RLA	LRA	FLA	Hp	ELA	Hp	HTR#	Volt	W	HA	A / Cooling	A / Heating	Max. AMP	Max. Breaker	Fuse Rating	
208/230V	197	6.55	39	0.55	0.15	0.7	0.22	2 KW	208	1725	8.2	7.2	8.8	9.5	15	6-15P	
									230	2000	8.8						
									3 KW	208	2525	12.1	7.2	13	14	20	6-20P
										230	3000	13					
									4 KW	208	3315	15.9	7.2	17.5	18.5	30	6-30P
										230	4000	17.5					

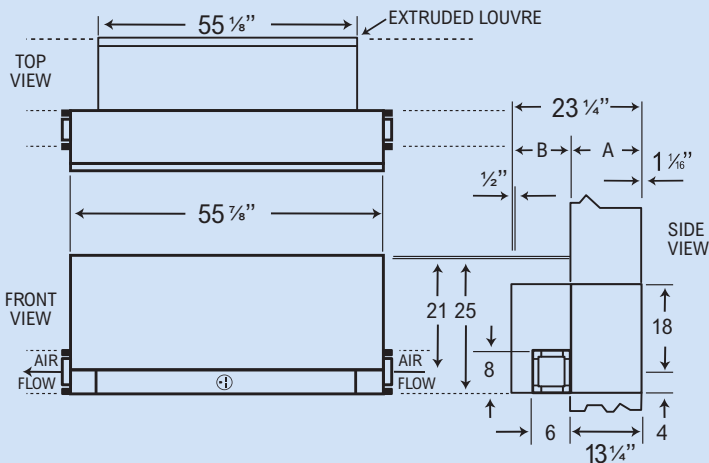


MODEL IDENTIFICATION

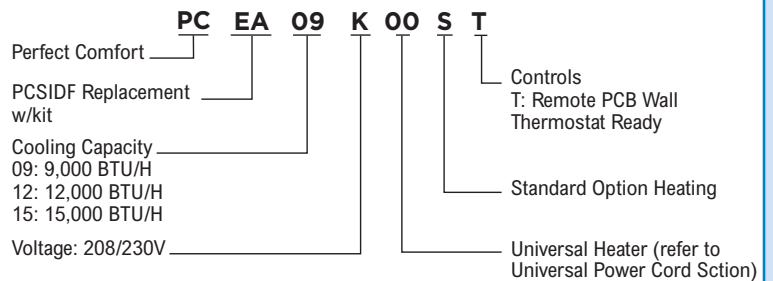

CORD PLUG AND WALL OUTLET (208/230V)

Tandem
Part # PC15S-P




15 AMP

Perpendicular
Part # PC20S-P



20 AMP

Large Tandem
Part # PC30S-P



30 AMP



Call 1-866-233-4022
Email info@perfectcomfort.ca
www.perfectcomfort.ca

DISTRIBUTED BY:

Manufacturer reserves the right to change specifications. Our products are subject to continuous improvements, Perfect Comfort / NRG Equipment reserves the right to modify product design and specifications, discontinue design without notice and without incurring any obligations.